


PLAN VIEW

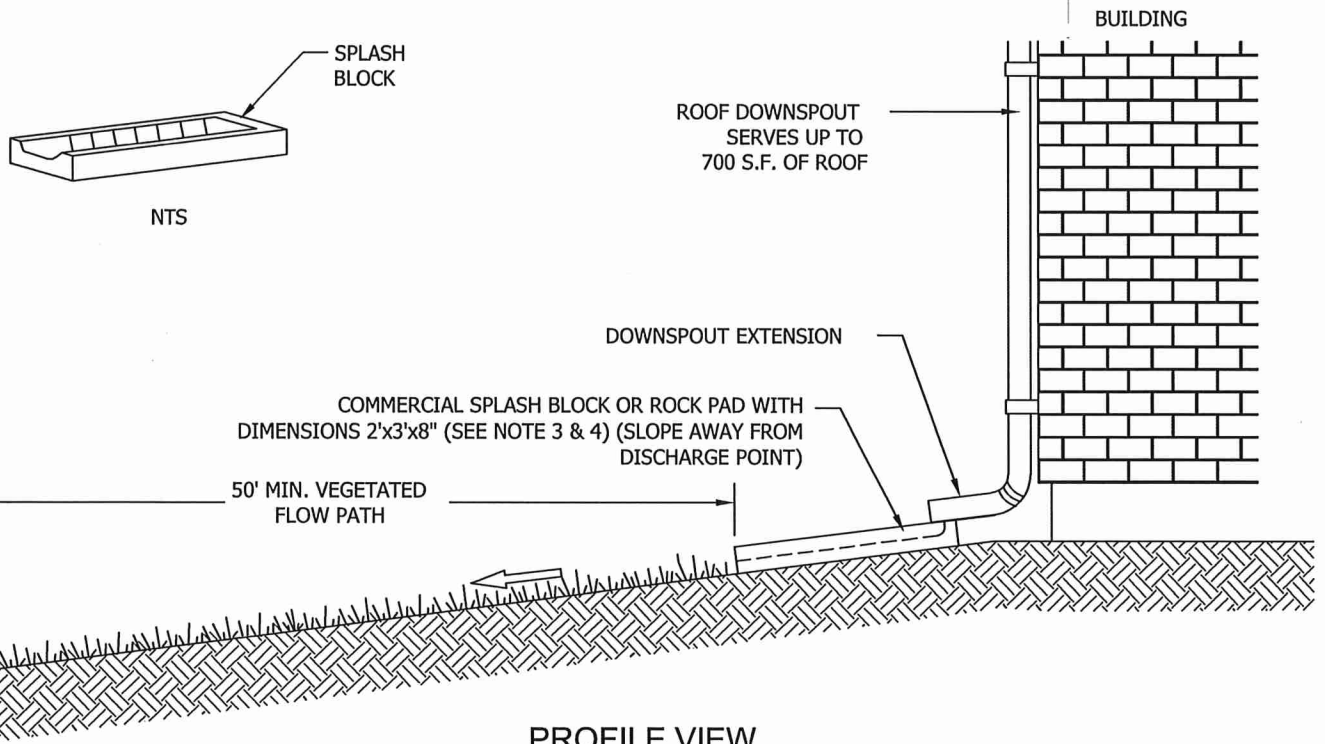

PROFILE VIEW

NOTES:

1. SPLASH BLOCKS SHALL BE DESIGNED IN ACCORDANCE WITH SECTION 210.4.
2. THE VEGETATED FLOW PATH SHALL BE MEASURED FROM THE SPLASH BLOCK (DISCHARGE POINT) AND MEASURED PERPENDICULAR TO SITE CONTOURS.
3. SPLASH BLOCKS SHALL BE CONCRETE, PLASTIC, OR SIMILAR MATERIAL. COMMERCIALY AVAILABLE SPLASH BLOCKS GENERALLY MEET DESIGN CRITERIA.
4. ROCK PAD SHALL CONSIST OF 4" COBBLES PER WSDOT 9-03.11(2).



CITY OF PUYALLUP
PUBLIC WORKS AND
DEVELOPMENT ENGINEERING

APPROVED FOR PUBLICATION



DATE SEALED: 10/23

**DOWNSPOUT
SPLASHBLOCK**

SCALE
NTS

DATE REVISED:
04/17/2023

CITY
STANDARD

FILE NAME: Y:\Shared\Drawings\City Standards\2018\02 - PART 2 -
STANDARD DETAILS\CAD\200\02.05.05

02.05.05