




LEGEND	
---	ROOF DRAIN
---	ROOF LINES
---	PROPERTY LINE
DS	DOWNSPOUT
o	PROPERTY CORNER

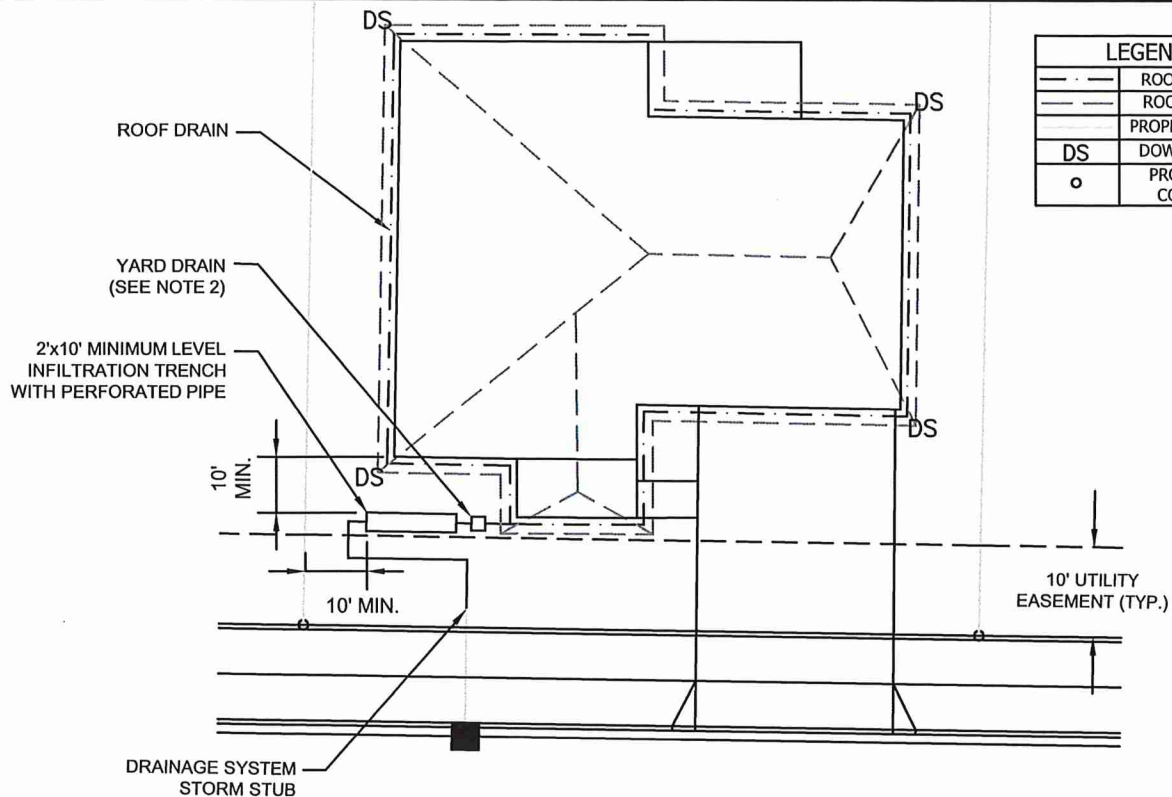

PLAN VIEW

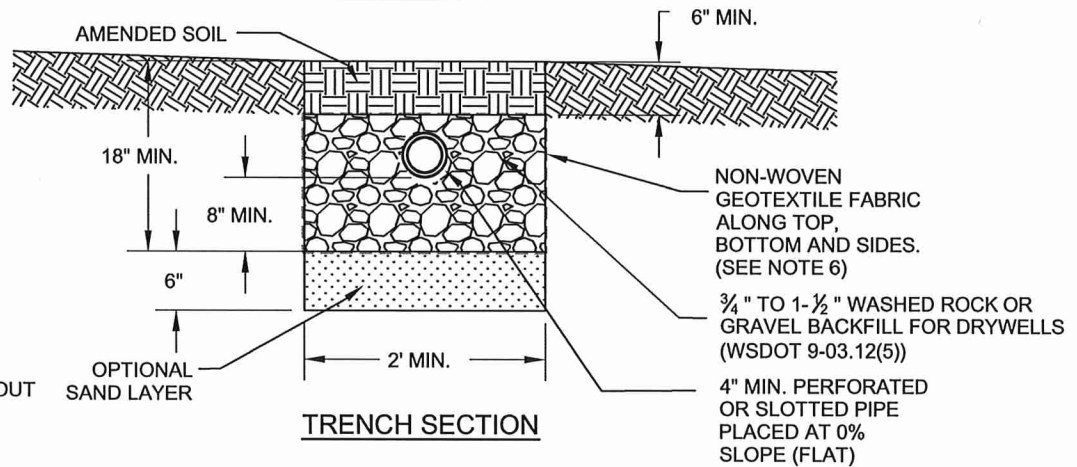

TRENCH SECTION

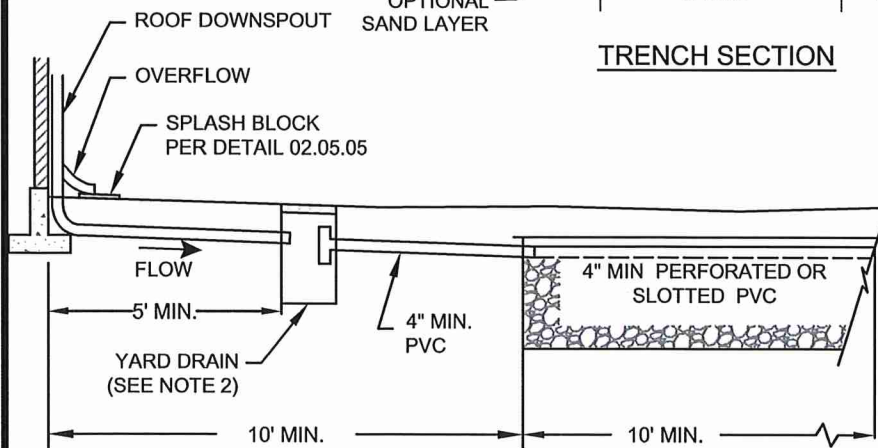

TRENCH PROFILE

NOTES:

1. ROOF DRAIN SHALL PROVIDE POSITIVE FLOW FROM DOWNSPOUTS (DS) TO YARD DRAINS.
2. YARD DRAINS SHALL BE INSTALLED UPSTREAM OF EACH PERFORATED STUB-OUT IN ACCORDANCE WITH STD DETAIL 02.05.02.
3. TRENCH BOTTOM SHALL BE A MINIMUM OF 1' ABOVE SEASONAL HIGH GROUNDWATER OR IMPERMEABLE SOIL LAYER.
4. TRENCH SHALL BE DESIGNED IN ACCORDANCE WITH SECTION 210.6.
5. TRENCH SHOULD NOT BE INSTALLED UNDER IMPERVIOUS SURFACES.
6. NON-WOVEN GEOTEXTILE TO CONFORM TO WSDOT 9-33.2(1), TABLE 1 AND 2.



CITY OF PUYALLUP
PUBLIC WORKS AND DEVELOPMENT ENGINEERING

APPROVED FOR PUBLICATION



PERFORATED STUB-OUT CONNECTION

SCALE: NTS

DATE REVISED: 05/19/2023

CITY STANDARD

FILE NAME: Y:\Shared\Drawings\City Standards\2018\02 - PART 2 - STANDARD DETAIL\CAD\200\02.05.07

02.05.07